



SFC SC FLOW PROPORTIONAL CONTROL

WALLACE & TIERNAN® ANALYZERS/CONTROLLERS

The Wallace & Tiernan® SFC SC system is used for flow proportional controlled dosing of chemicals used in water treatment and for similar industrial process applications. It can control automatic V-notch positioners in gas feed systems, such as the V10k™ and V2000™ systems, or automatic stroke length positioners and variable speed drives in dosing pump systems.

The SFC SC system is available either as stand alone wall-mounted unit, equipment-mounted, or as a panel-mountable unit for installation in a control enclosure.

The SFC SC flow proportional control compliments the SFC series of products which measure and control various parameters, including free and total chlorine, chlorine dioxide, ozone, fluoride, ORP (redox) and pH value.

TYPICAL APPLICATIONS

- Potable water treatment
- Waste water treatment
- Cooling water circuits
- Industrial and process water treatment
- Swimming pools

FEATURES


- Determines the control signal for the positioner/dosing pump from the control variable and the dosing factor
- Sets the position of the positioner accurately using a feedback signal
- Automatic correction in the event of nonlinearity of the gas feeder
- Wide dosage range: 10 – 400 %
- Electronic override
- mA or relay output control signals
- Security access

Key Benefits


- Easy to operate thanks to intuitive menu navigation, diagnostics menu to simplify maintenance and installation, automatic display of any faults
- Multiple correction values can be used for linearization of the dosing feedback
- Graphical display of all parameters and process variables
- User-selectable units for flow and dosing
- Galvanically isolated inputs and outputs

SFC ELECTRONIC MODULE

| | |
|--|--|
| Display | Back-lit LCD display, resolution 128 x 64 pixels |
| Measurement input | 0/4 - 20 mA, 47 Ω impedance, isolated |
| Feedback input | 0/4 - 20 mA or 0 - 1 V or 1 kΩ, 5 kΩ potentiometer linearization over maximum 11 correction values |
| Digital inputs | 2 x inputs for voltage-free contact (< 100 Ω) power supply via SFC SC (12 V) |
| Switching relay outputs - Switching values - L/CSA-ratin | 2 x controller outputs 5 A, 250 V AC, 1250 VA max 5 A, 220 V DC, 150 W max 5 A, 1/6 HP 125, 250 V AC 5 A, 30 V DC, 30 W max 1 A, 30 V DC - 0.24 A, 125 V DC |
| Analog output | 0/4 - 20 mA; load protected ≤ 500 Ω; Accuracy < 0.5 % FS; Galv. isolated up to 50 V relative to earth |
| Interface | RS 232 for firmware updates |
| Characteristics | Dosage factor adjustable from 10 - 400 %; Flow scaling factor free selectable |
| Power supply | 24 V DC or 100 - 240 V AC, 50/60 Hz |
| Ambient temperature | 0 - 50 °C (32 - 122 °F) |
| Enclosure | IP 66, designed to meet NEMA 4X |
| Installation options | Wall-mounted, equipment-mounted (e.g. V10k, V2000), or panel-mounted in a control enclosure |
| Weight (incl. packaging) | approx. 2.5 kg (5.5 lbs) |
| Dimensions (W x H x D) | 185 x 265 x 145 mm (7.3 x 10.4 x 5.7 ") |
| Testing and marking | CE, EMC-EN 61326 IEC EN 61010 UL listed/CSA certified |

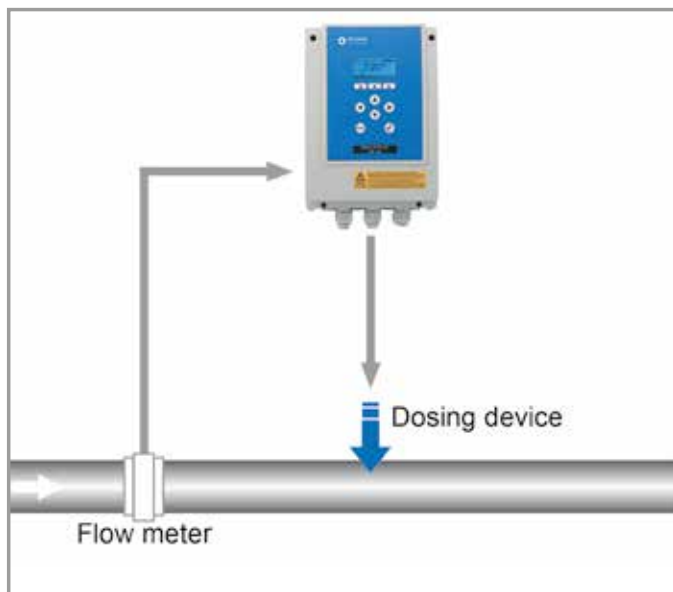

Dosing is directly proportional to the measured flow rate.

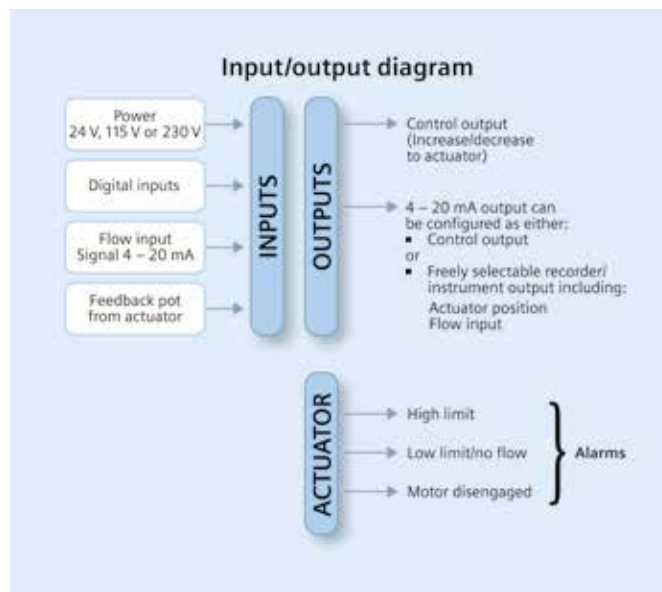

Auf der Weide 10, 89312 Günzburg, Germany
+49 (8221) 904-0 www.evoqua.com

V10k, V2000 and Wallace & Tiernan are trademarks of Evoqua, its subsidiaries or affiliates, in some countries.

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2017 Evoqua Water Technologies GmbH Subject to change without notice WT.050.590.020.IE.PS.0917

Wallace & Tiernan® Products worldwide

Australia

+61 3 8720 6597

info.au@evoqua.com

Canada

+1 905 944 2800

canadainfo@evoqua.com

China

+86 21 6057 7247

sales.cn@evoqua.com

France

+33 1 41 15 92 20

wtfra@evoqua.com

Germany

+49 8221 9040

wtger@evoqua.com

Singapore

+65 6830 7165

sales.sg@evoqua.com

UK

+44 300 124 0500

info.uk@evoqua.com

USA

+1 856 507 9000

wt.us@evoqua.com