


ACCU-PULSE IF Pulsation Dampeners

Chargeable / Metal / Flat Top

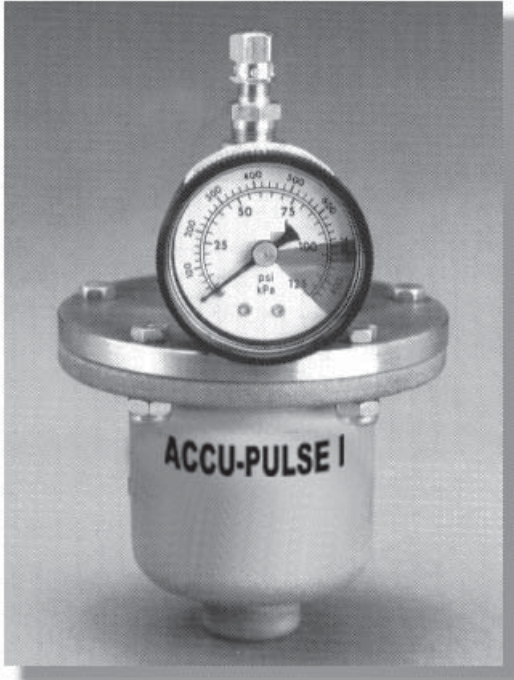

- remove pulsating flows from positive displacement pumps
- increase system efficiency and pump life
- decrease maintenance and costs
- protect pipes, meters, instruments, valves, gaskets and seals from pulsation and vibration
- ensure meter accuracy, longevity and repeatability
- reduce pressure fluctuations and diaphragm wear
- prevent foaming and splashing

FEATURES

- CRN is available on certain metallic units
- extensive range of materials
- lightweight, compact design
- 300 psi rating
- easy in-line maintenance
- 2 year warranty

Technical Data

Unit Capacity: 4 CU In

Weight: 2 pounds

Air Control: Gas Fill Valve

Inlet Port: 3/8" NPTF, optional 1/2" NPTF

Pressure Limit: 300 psi at 70° F **

Shell Materials: 316L Stainless Steel, Alloy 20, Hastelloy C, Carbon Steel

Elastomers: Neoprene, Buna-N, EPDM, Viton, Hypalon, Teflon (150 max psi)


****Caution:** Temperature and pressure affect the strength and chemical resistance of plastic and rubber.

ACCU-PULSE IF Pulsation Dampeners


Operation:

ACCU-Pulse pulsation dampeners operate on the principal that volume is inversely proportional to pressure. Compressed air or gas is introduced into the top section of ACCU-Pulse to a specified pressure that must be lower than the pump's discharge pressure. When a pump or valve introduces a pulse, fluid enters the dampener and compresses the trapped gas. The fluid remains in the dampener until the system pressure returns to normal, when the valve is reopened or the pump begins its next cycle. The fluid is then pushed back into the system piping as the trapped gas expands. ACCU-Pulse does NOT restrict fluid flow, or increase system pressure. ACCU-Pulse fills the fluid voids and pressure fluctuations created by reciprocating pumps.

Typical Installations:

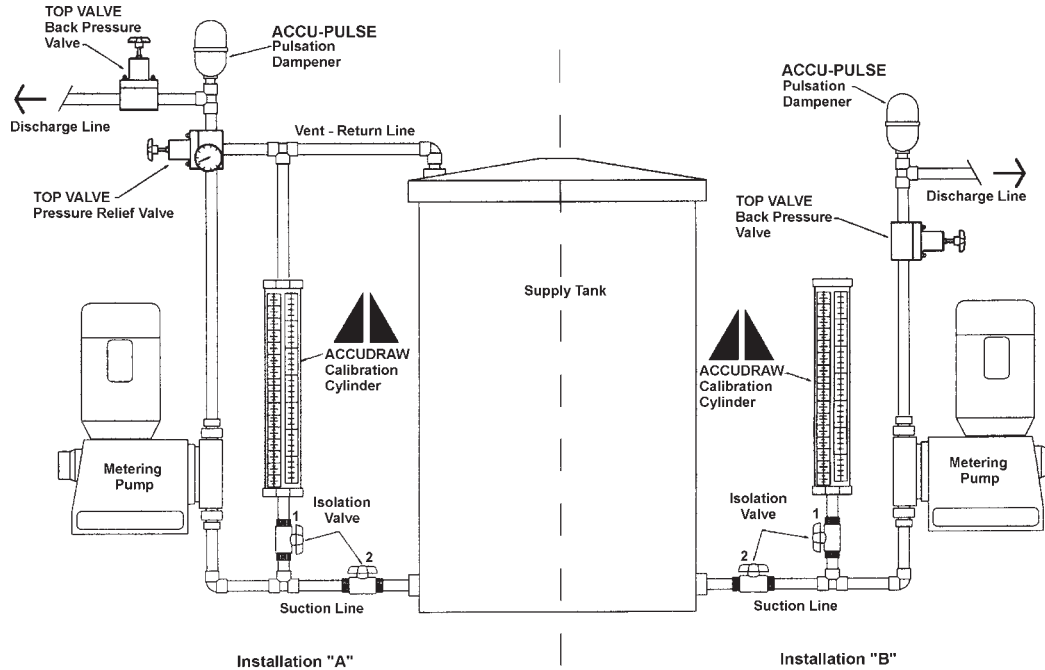

Dimensions:

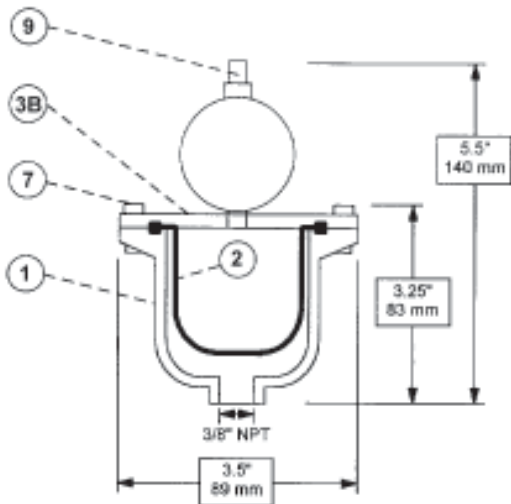


Parts Description:

Item	Part #	Qty	Description	Material
1	1020-27- ^A	1	Wetted Housing	316 Stainless Steel
	1070-27- ^A		Wetted Housing	Alloy 20
	1080-27- ^A		Wetted Housing	Hastelloy C
⊕ 2	1000-25	1	Bladder	Neoprene
	1000-28		Bladder	EPDM
	1000-29		Bladder	Buna-N
	1000-30		Bladder	Hypalon
	1000-31		Bladder	Viton
	1000-55		Bladder	Aflas
	P1000-10		Bladder	Teflon
3A	1020-33	1	NonWetted Housing	316 Stainless Steel
	1070-33		NonWetted Housing	Alloy 20
	1080-33		NonWetted Housing	Hastelloy C
7	1020-43	6	Fastener Assembly	Stainless Steel
⊕ 9	1020-58		Chargeable Air Assembly	Brass, S/S
^A add suffix -0 for units with 3/8" connections ^A add suffix -1 for units with 1/2" connections ⊕ Recommended Spare Parts				

ACCU-PULSE IIF Pulsation Dampeners

Chargeable / Metal / Flat Top

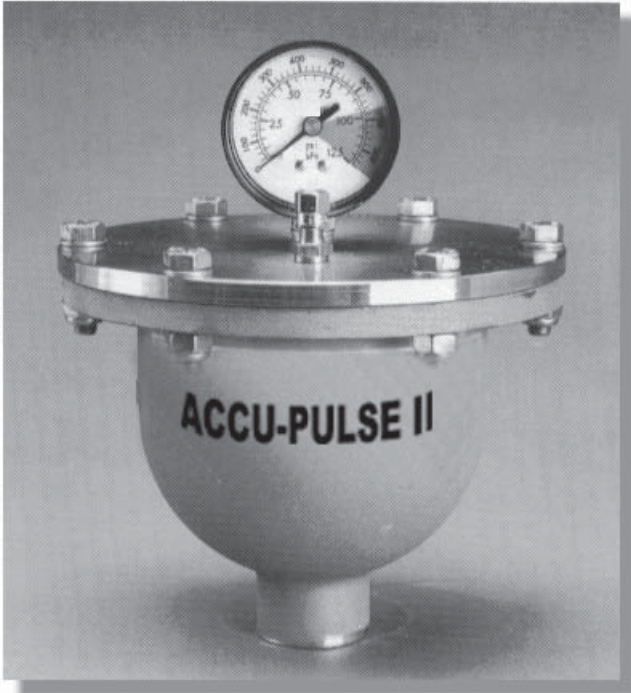

- remove pulsating flows from positive displacement pumps
- increase system efficiency and pump life
- decrease maintenance and costs
- protect pipes, meters, instruments, valves, gaskets and seals from pulsation and vibration
- ensure meter accuracy, longevity and repeatability
- reduce pressure fluctuations and diaphragm wear
- prevent foaming and splashing

FEATURES

- CRN is available on certain metallic units
- extensive range of materials
- lightweight, compact design
- 300 psi rating
- easy in-line maintenance
- 2 year warranty

Technical Data

Unit Capacity: 36 CU In

Weight: 10-11 pounds

Air Control: Gas Fill Valve

Inlet Port: 3/4" NPTF, optional 1" NPTF

Pressure Limit: 300 psi at 70° F **

Shell Materials: 316L Stainless Steel, Alloy 20, Hastelloy C, Carbon Steel

Elastomers: Neoprene, Buna-N, EPDM, Viton, Hypalon, Teflon (max 150 psi)


****Caution:** Temperature and pressure affect the strength and chemical resistance of plastic and rubber.

ACCU-PULSE IIF Pulsation Dampeners


Operation:

ACCU-Pulse pulsation dampeners operate on the principal that volume is inversely proportional to pressure. Compressed air or gas is introduced into the top section of ACCU-Pulse to a specified pressure that must be lower than the pump's discharge pressure. When a pump or valve introduces a pulse, fluid enters the dampener and compresses the trapped gas. The fluid remains in the dampener until the system pressure returns to normal, when the valve is reopened or the pump begins its next cycle. The fluid is then pushed back into the system piping as the trapped gas expands. ACCU-Pulse does NOT restrict fluid flow, or increase system pressure. ACCU-Pulse fills the fluid voids and pressure fluctuations created by reciprocating pumps.

Typical Installations:

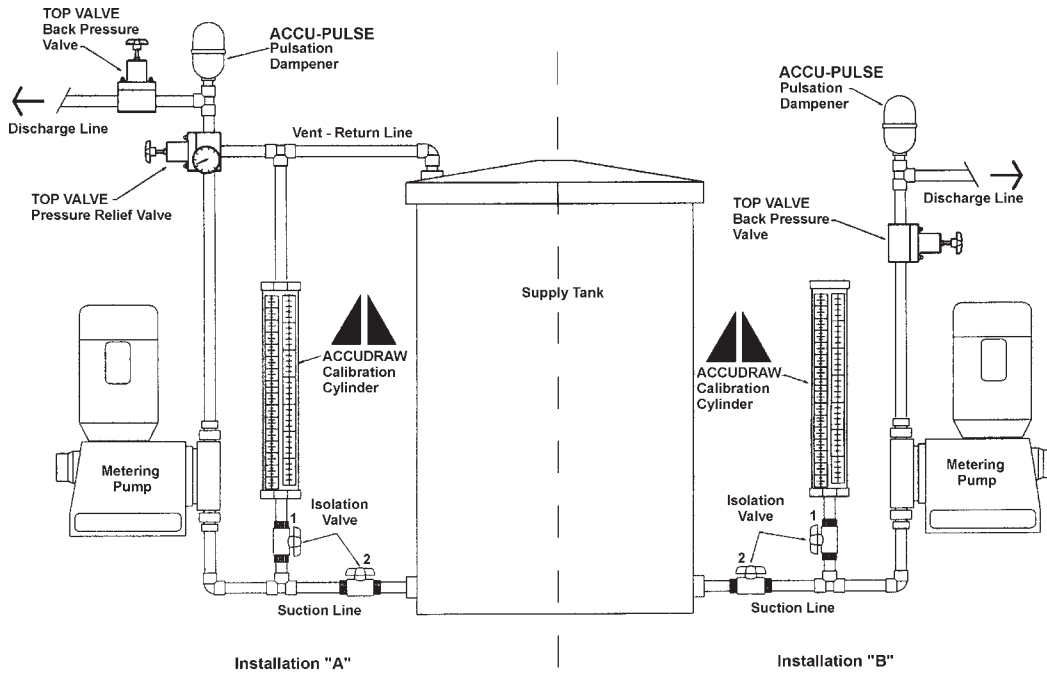

Dimensions:

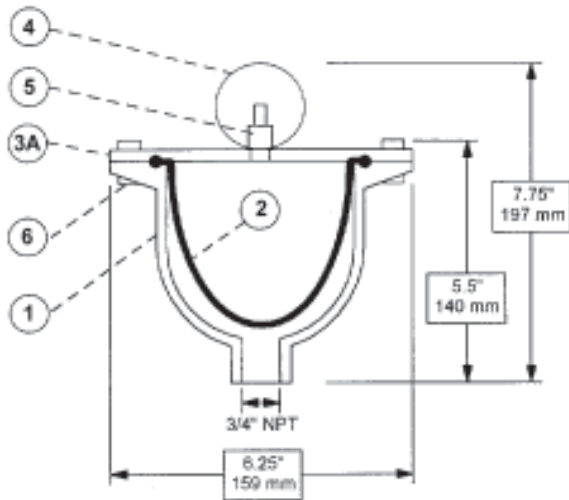

Parts Description:

Item	Part #	Qty	Description	Material
1	2901-27-^	1	Wetted Housing	316 Stainless Steel
	2970-27-^		Wetted Housing	Alloy 20
	2905-27-^		Wetted Housing	Hastelloy C
⊕ 2	301-25	1	Bladder	Neoprene
	401-29		Bladder	Buna-N
	401-28		Bladder	EPDM
	401-25		Bladder	Viton
	401-30		Bladder	Hypalon
	301-55		Bladder	Aflas
	301-10		Bladder	Teflon
3B	2901-33	1	NonWetted Housing	316 Stainless Steel
	2970-33		NonWetted Housing	Alloy 20
	2980-33		NonWetted Housing	Hastelloy C
⊕ 4	G40	1	Gauge (All Bladders)	S/S / Brass
⊕ 5	101-71	1	Fill Valve	Stainless Steel
6	2924-00	8	Fastener Assembly	Stainless Steel
^ add suffix -2 for unit with 3/4" connections				
^ add suffix -3 for units with 1" connections				
⊕ Recommended Spare Parts				

ACCU-PULSE III Pulsation Dampeners

Chargeable / Metal / Flat Top



- remove pulsating flows from positive displacement pumps
- increase system efficiency and pump life
- decrease maintenance and costs
- protect pipes, meters, instruments, valves, gaskets and seals from pulsation and vibration
- ensure meter accuracy, longevity and repeatability
- reduce pressure fluctuations and diaphragm wear
- prevent foaming and splashing

FEATURES

- CRN is available on certain metallic units
- extensive range of materials
- lightweight, compact design
- 300 psi rating
- easy in-line maintenance
- 2 year warranty

Technical Data

Unit Capacity: 175 CU In

Weight: 26-27 pounds

Air Control: Gas Fill Valve

Inlet Port: 2" NPTF

Pressure Limit: 300 psi at 70° F ** (optional 1000 psi @ 70° F add suffix -H)

Shell Materials: 316L Stainless Steel, Alloy 20, Hastelloy C, Carbon S teel

Elastomers: Neoprene, Buna-N, EPDM, Viton, Hypalon, Teflon (max 150 psi)


****Caution:** Temperature and pressure affect the strength and chemical resistance of plastic and rubber.

ACCU-PULSE IIF Pulsation Dampeners


Operation:

ACCU-Pulse pulsation dampeners operate on the principal that volume is inversely proportional to pressure. Compressed air or gas is introduced into the top section of ACCU-Pulse to a specified pressure that must be lower than the pump's discharge pressure. When a pump or valve introduces a pulse, fluid enters the dampener and compresses the trapped gas. The fluid remains in the dampener until the system pressure returns to normal, when the valve is reopened or the pump begins its next cycle. The fluid is then pushed back into the system piping as the trapped gas expands. ACCU-Pulse does NOT restrict fluid flow, or increase system pressure. ACCU-Pulse fills the fluid voids and pressure fluctuations created by reciprocating pumps.

Typical Installations:

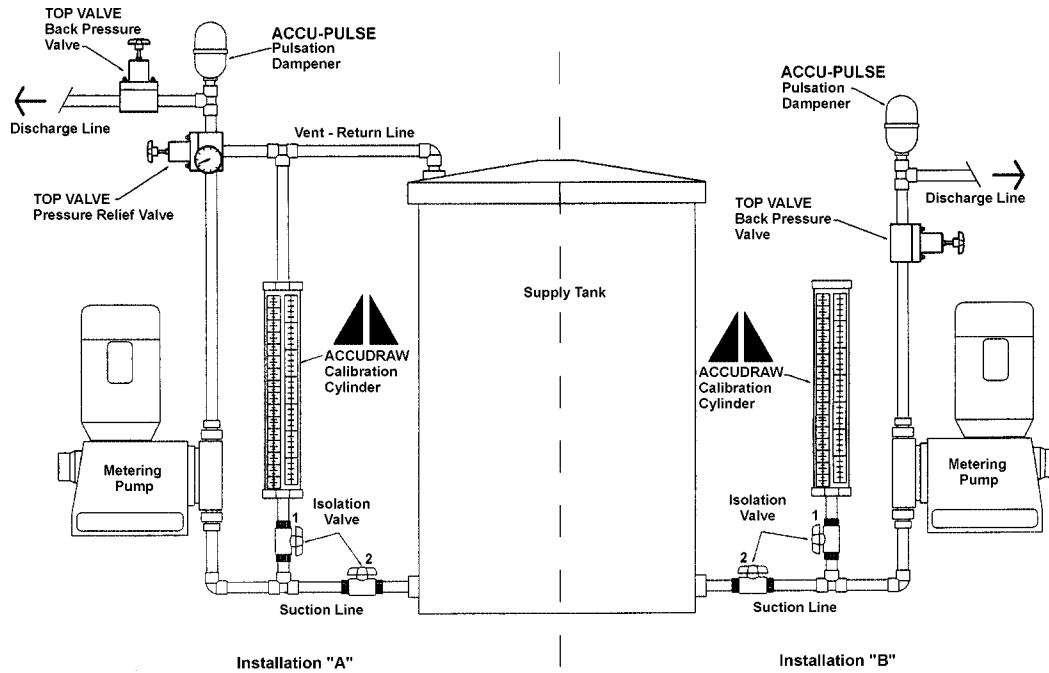

Dimensions:

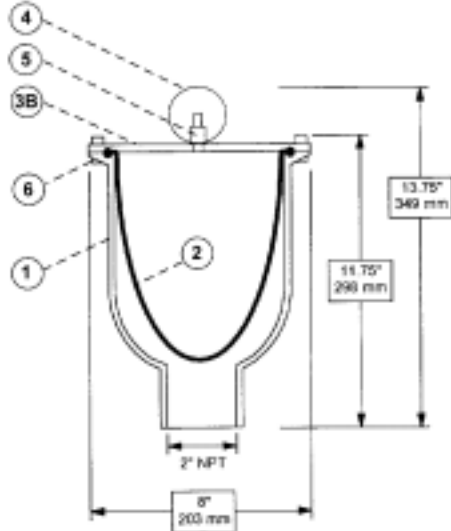

Parts Description:

Item	Part#	Qty	Description	Material
1	901-28	1	Wetted Housing	316 Stainless Steel
	907-28		Wetted Housing	Alloy 20
	905-28		Wetted Housing	Hastelloy C
±2	101-25	1	Bladder	Neoprene
	201-28		Bladder	EPDM
	201-29		Bladder	Buna - N
	201-30		Bladder	Hypalon
	201-25		Bladder	Viton
	101-55		Bladder	Aflas
	101-10		Bladder	Teflon
3B	901-43	1	NonWetted Housing	316 Stainless Steel
±4	G40	1	Gauge (All Bladders)	S/S / Brass
±5	101-71	1	Fill Valve	Stainless Steel
6	901-47	8	Fastener Assembly	Stainless Steel
	901-50+		Fastener Assembly	Stainless Steel
+ only used with Teflon Bladders				
± Recommended Spare Parts				

Distributed By:



New South Wales and
Australian Capital Territory
+61 2 4350 8200

Victoria
+61 3 9325 3900

Northern Territory and
South Australia
+61 8 8374 7800

Western Australia
+61 8 9412 6100

Queensland
+61 7 3802 9500

sales@trility.com.au

Tasmania
+61 3 6391 7300